

EXHIBIT 10


United States Patent [19][11] **Patent Number:** **6,162,587****Yang et al.**[45] **Date of Patent:** **Dec. 19, 2000**[54] **THIN RESIST WITH TRANSITION METAL
HARD MASK FOR VIA ETCH APPLICATION**[75] Inventors: **Chih Yuh Yang**, San Jose; **Christopher F. Lyons**, Fremont; **Harry J. Levinson**, Saratoga; **Khanh B. Nguyen**, San Mateo; **Fei Wang**; **Scott A. Bell**, both of San Jose, all of Calif.[73] Assignee: **Advanced Micro Devices**, Sunnyvale, Calif.[21] Appl. No.: **09/203,450**[22] Filed: **Dec. 1, 1998**[51] **Int. Cl.⁷** **G03C 5/00**[52] **U.S. Cl.** **430/314; 430/316; 430/317; 430/318**[58] **Field of Search** 430/313, 316, 430/318, 314, 317; 438/423, 424; 216/47, 39[56] **References Cited****U.S. PATENT DOCUMENTS**


4,299,911	11/1981	Ochi et al.	430/286
5,040,020	8/1991	Rauschenbach et al.	355/53
5,534,312	7/1996	Hill et al.	427/533
5,757,077	5/1998	Chung et al.	257/736

5,786,262	7/1998	Jang et al.	438/424
5,817,567	10/1998	Jang et al.	438/427
5,976,769	11/1999	Chapman	430/316
5,985,766	11/1999	Wu et al.	438/700
5,989,776	11/1999	Felter	430/270.1

Primary Examiner—Mark F. Huff*Assistant Examiner*—Saleha R. Mohamedulla*Attorney, Agent, or Firm*—Amin, Eschweiler & Turocy, LLP[57] **ABSTRACT**

A method of forming a via structure is provided. In the method, a dielectric layer is formed on an anti-reflective coating (ARC) layer covering a first metal layer; and a transition metal layer is formed on the dielectric layer. An ultra-thin photoresist layer is formed on the transition metal layer, and the ultra-thin photoresist layer is patterned with short wavelength radiation to define a pattern for a via. The patterned ultra-thin photoresist layer is used as a mask during a first etch step to transfer the via pattern to the transition metal layer. The first etch step includes an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer and the dielectric layer. The transition metal layer is employed as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer.

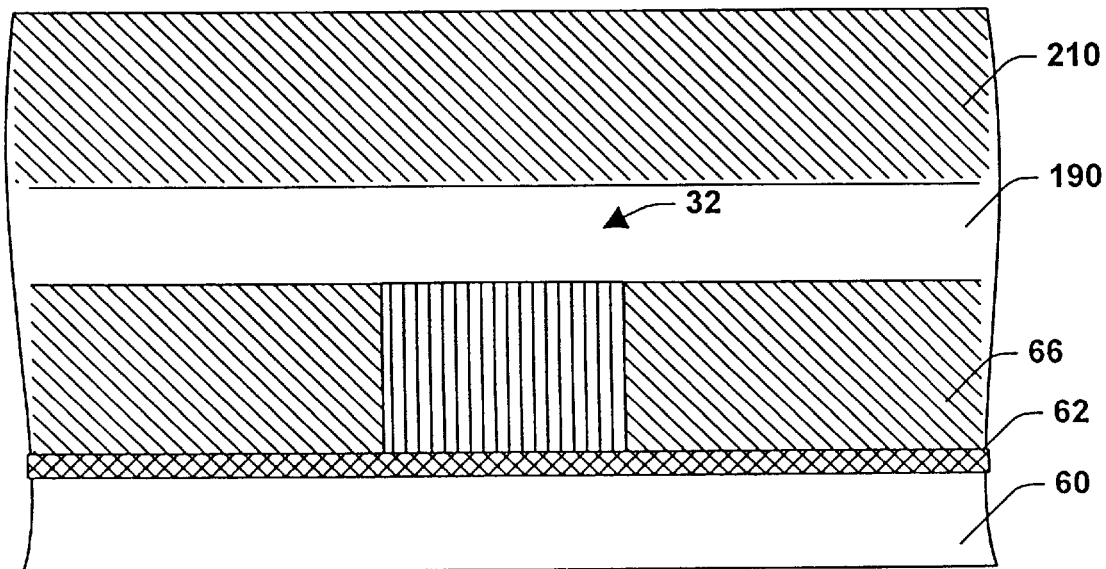14 Claims, 9 Drawing Sheets

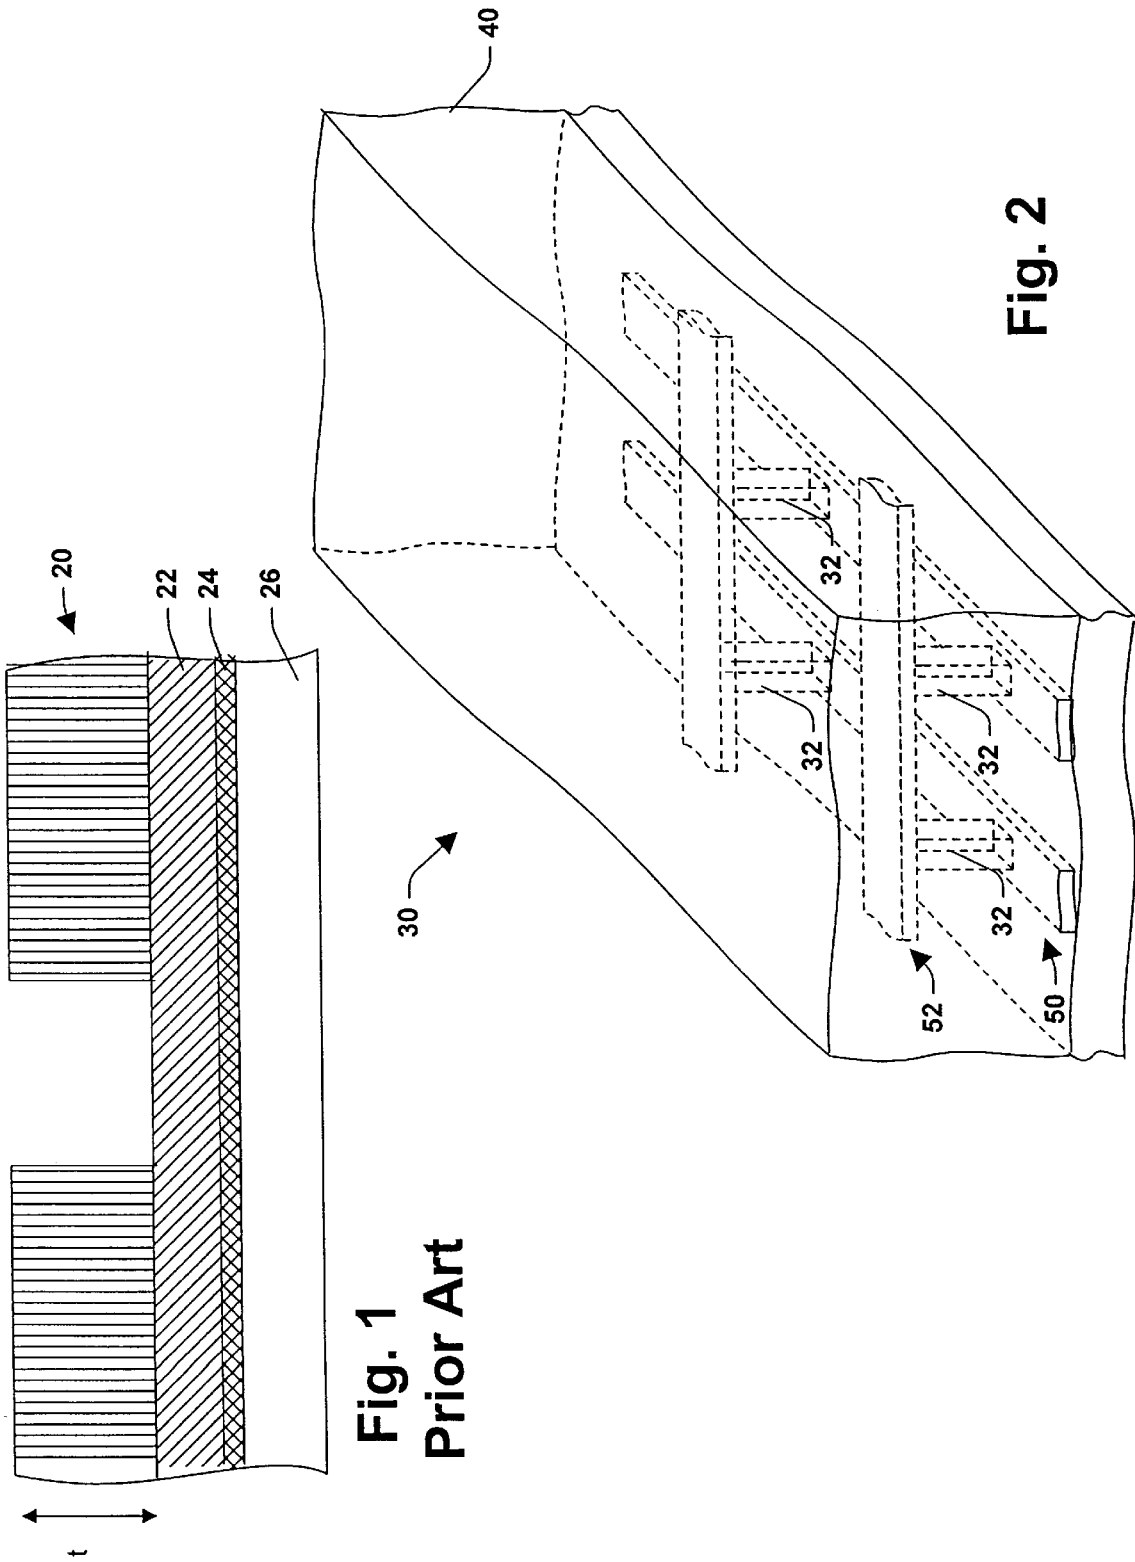

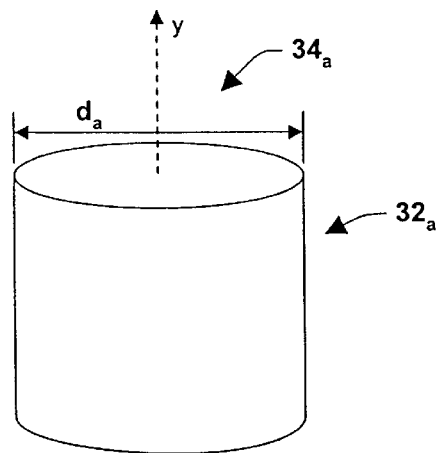


Fig. 3a

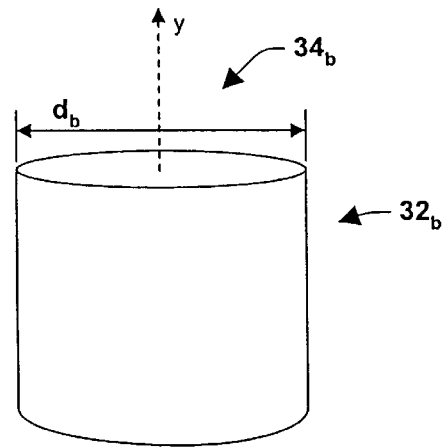


Fig. 3b

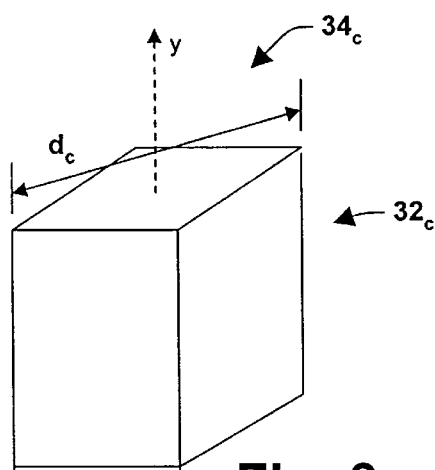


Fig. 3c

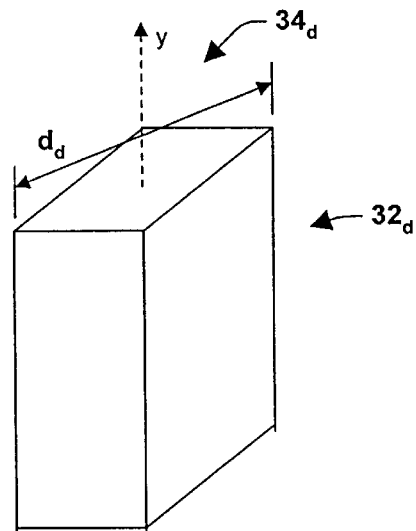


Fig. 3d

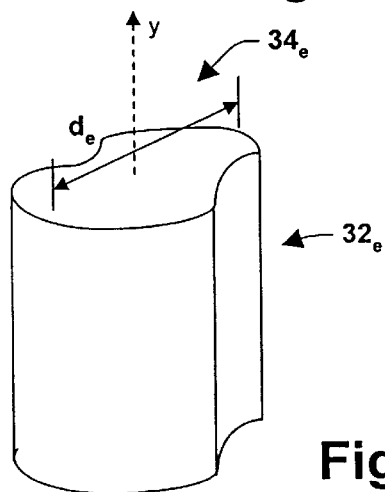


Fig. 3e

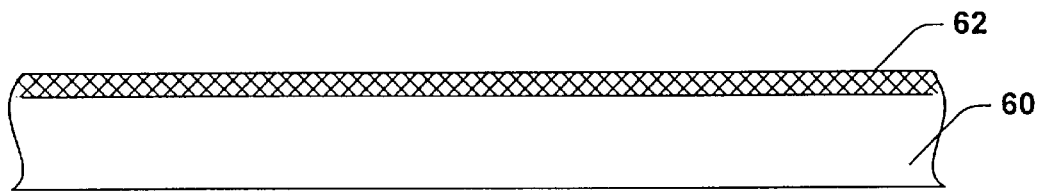


Fig. 4

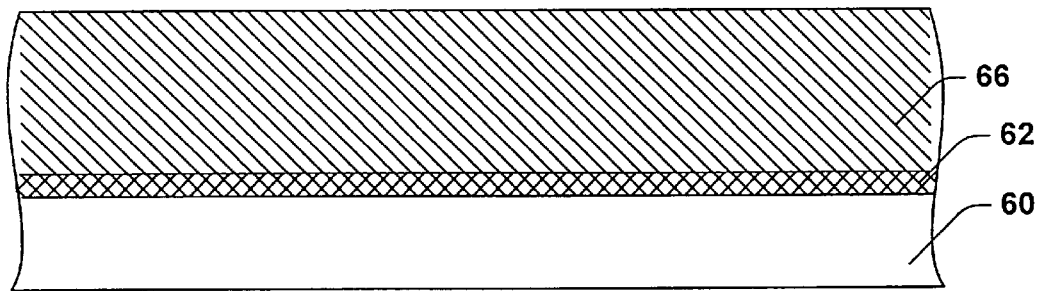


Fig. 5

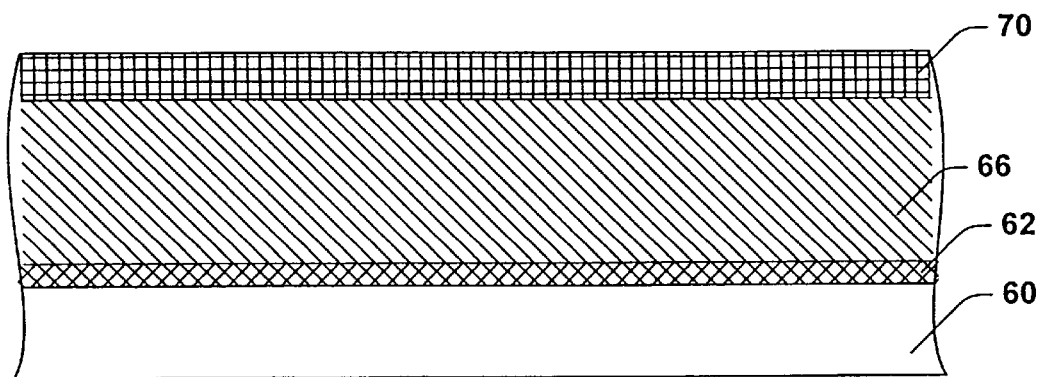


Fig. 6

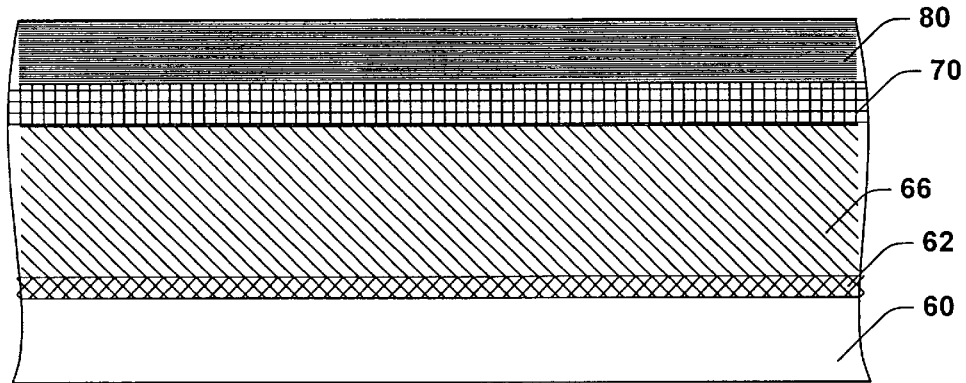


Fig. 7

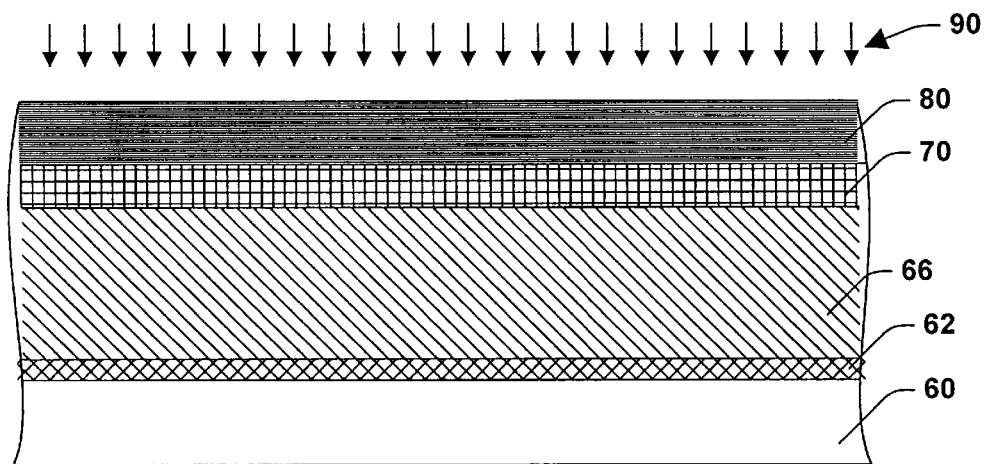


Fig. 8

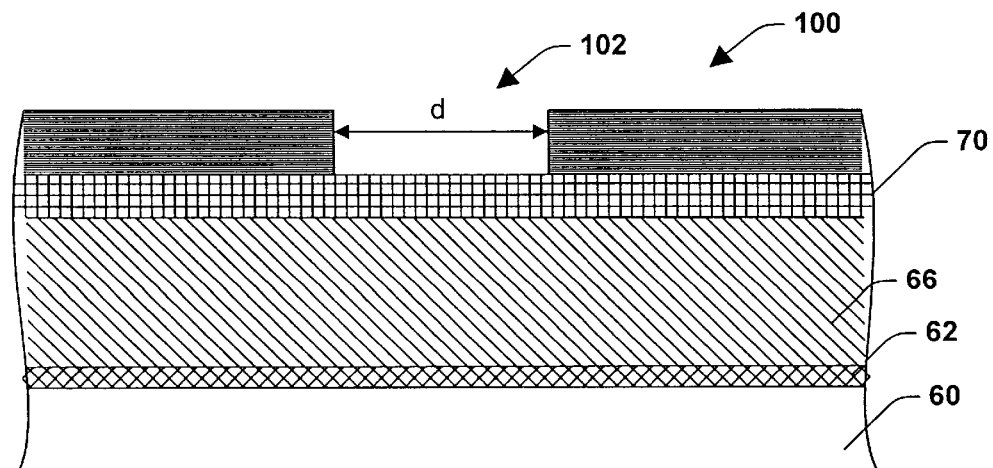


Fig. 9

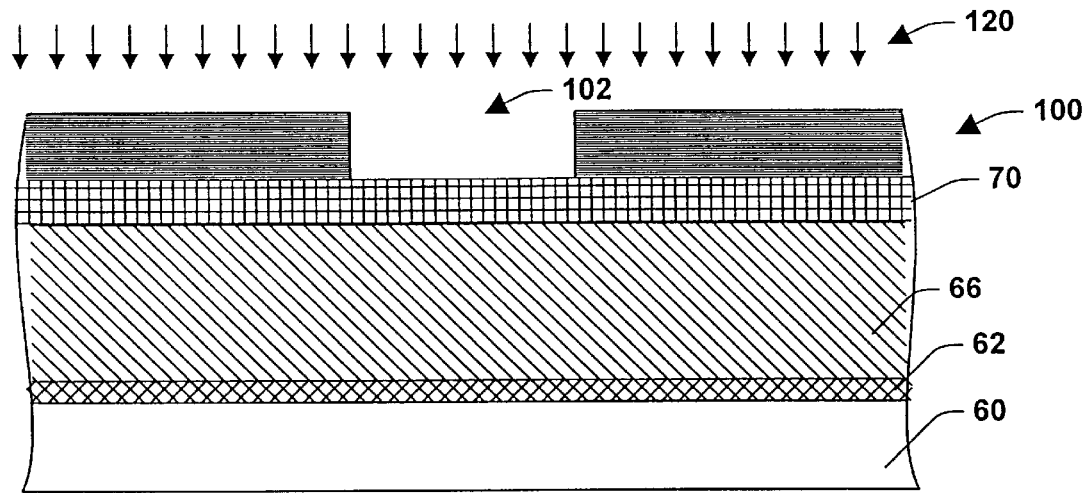


Fig. 10

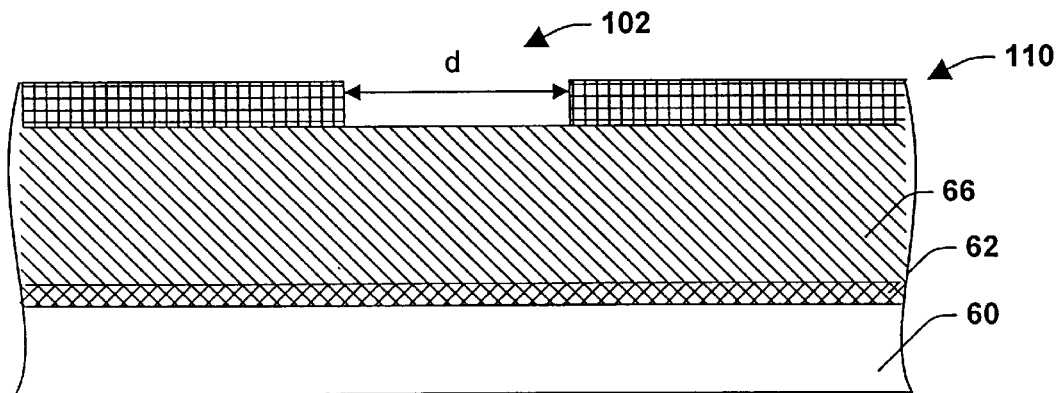


Fig. 11

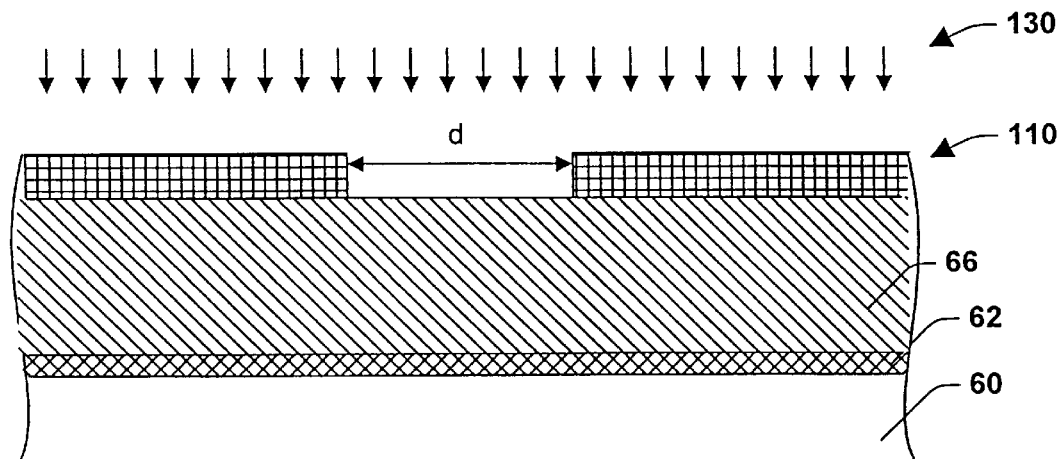


Fig. 12

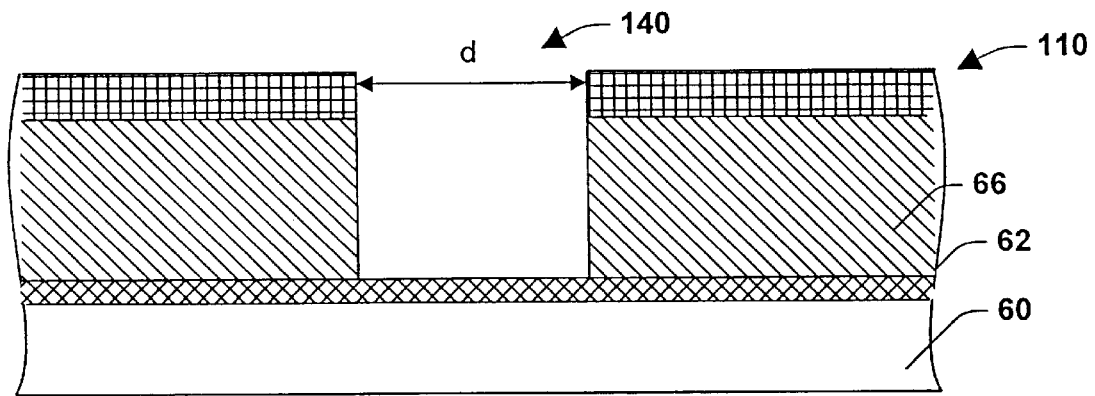


Fig. 13

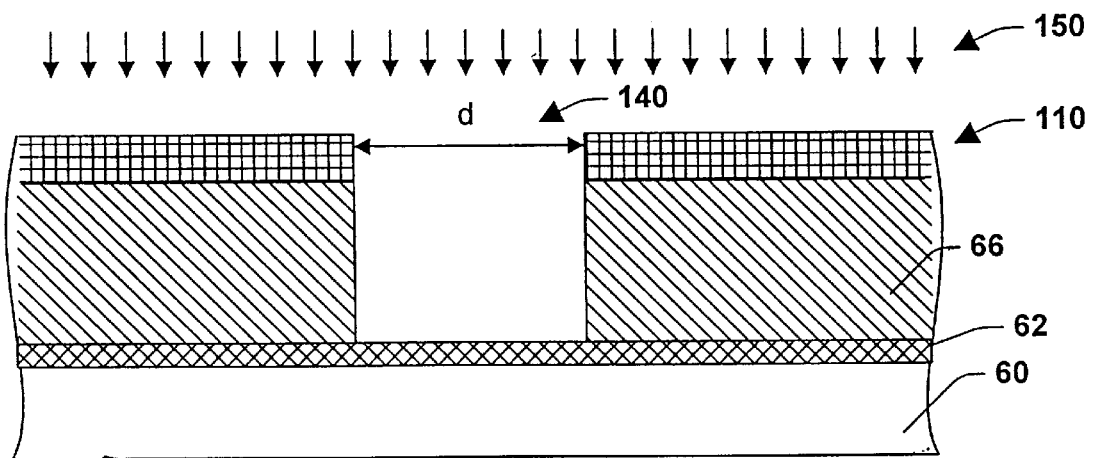


Fig. 14

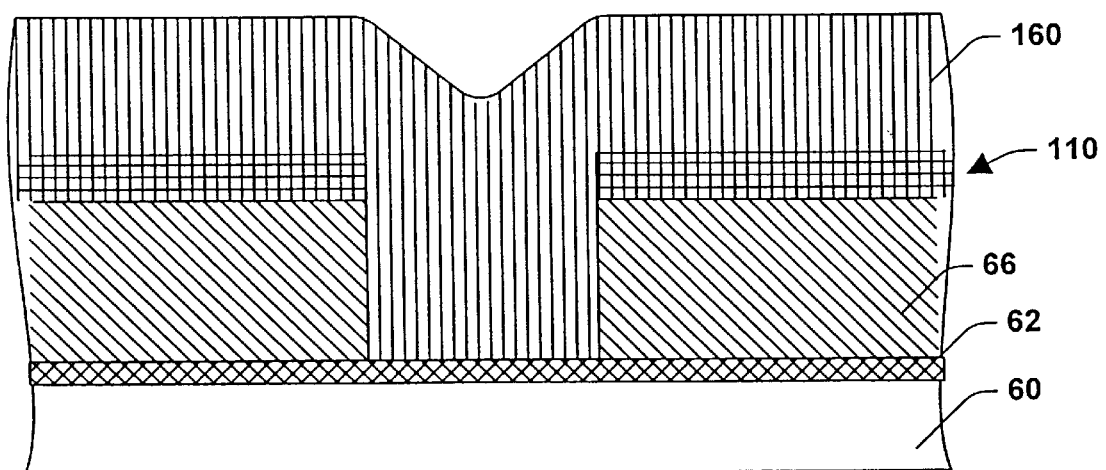


Fig. 15

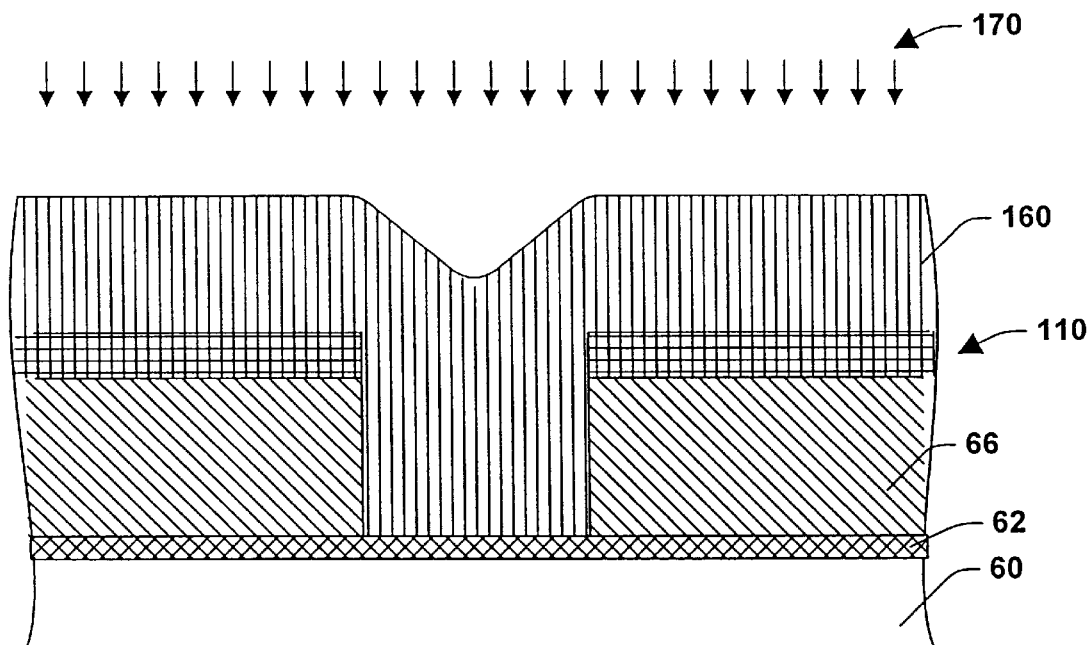


Fig. 16

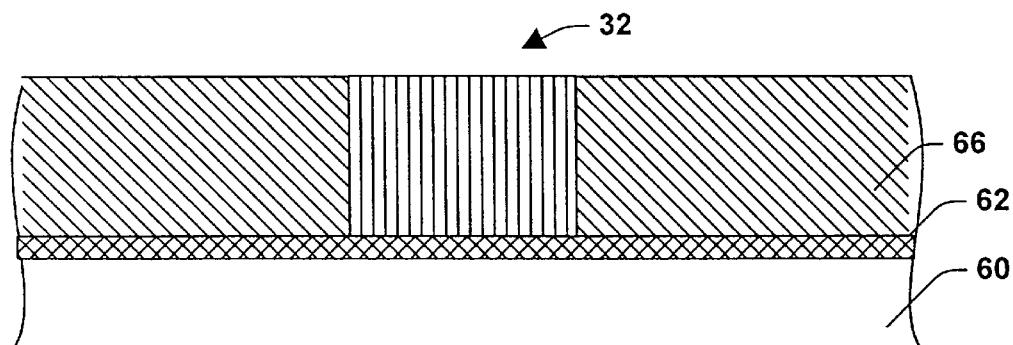


Fig. 17

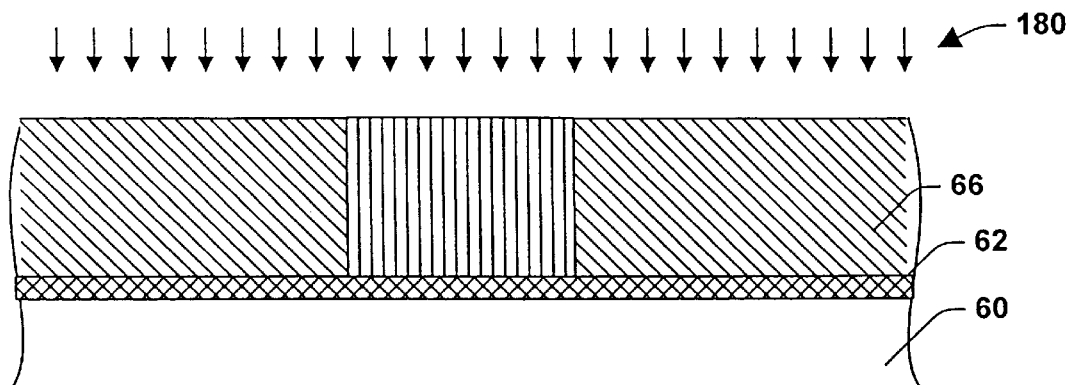


Fig. 18

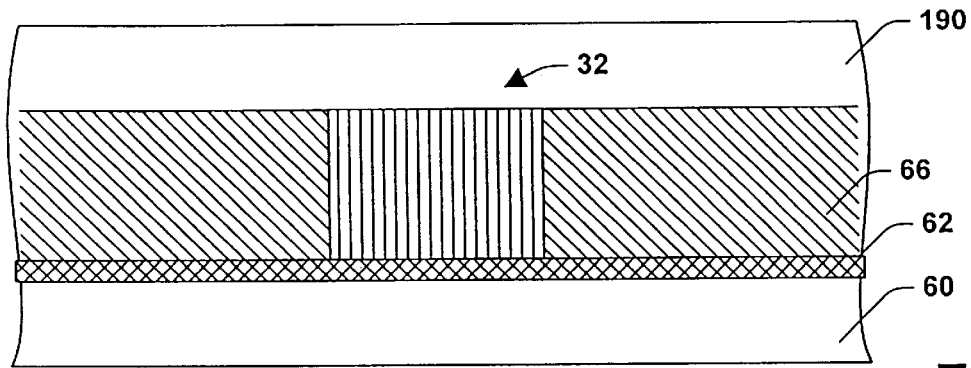


Fig. 19

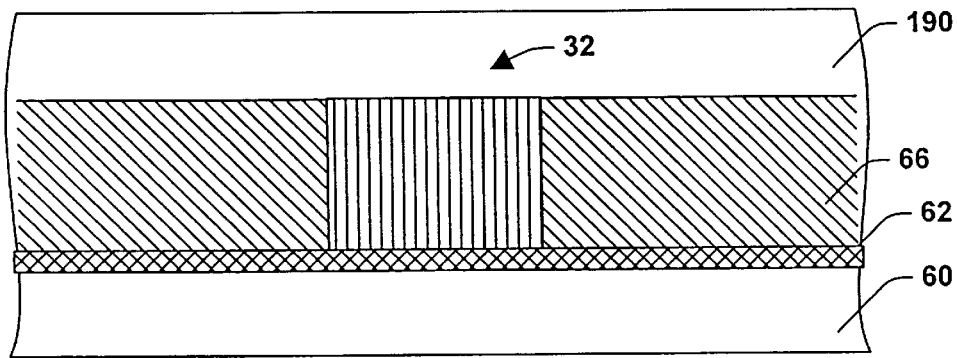


Fig. 20

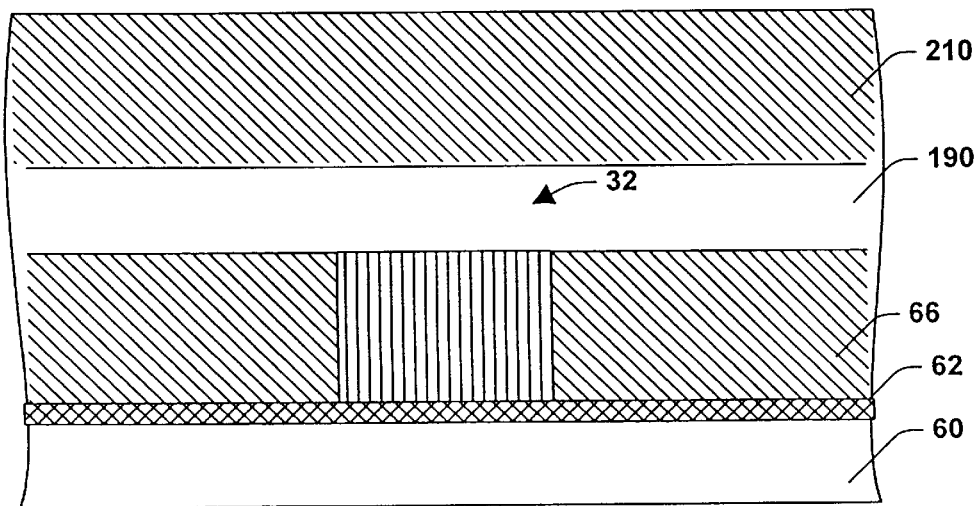


Fig. 21

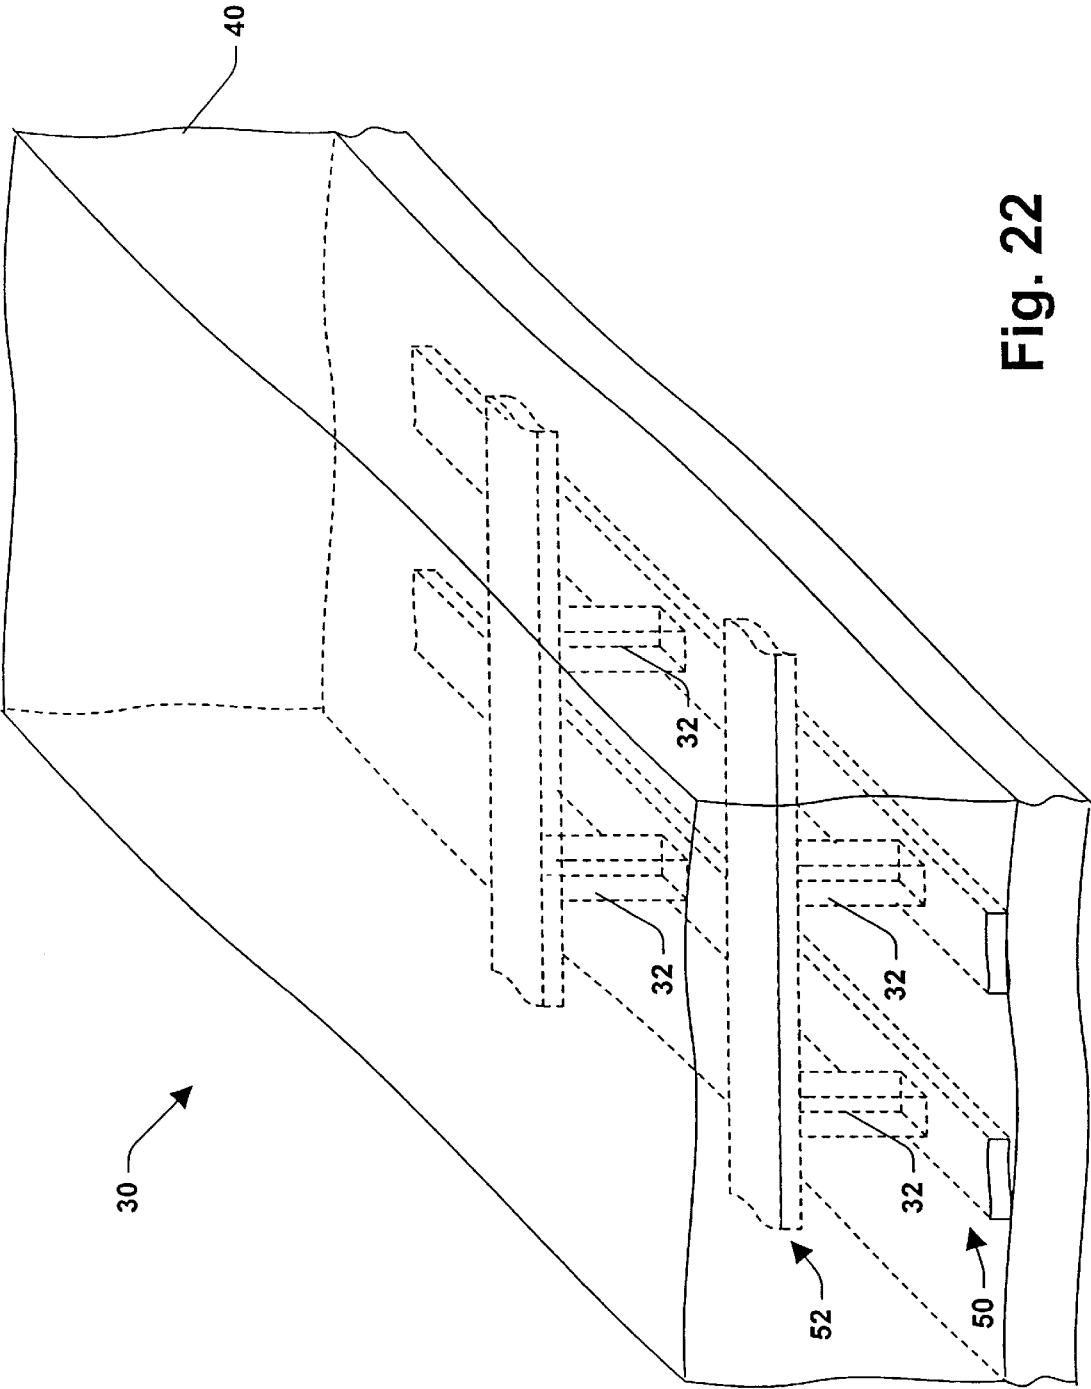


Fig. 22

6,162,587

1

THIN RESIST WITH TRANSITION METAL HARD MASK FOR VIA ETCH APPLICATION

TECHNICAL FIELD

The present invention generally relates to photo-
lithography, and more particularly relates to a method of
forming sub-micron vias using short wavelength radiation
and ultra-thin photoresists.

BACKGROUND OF THE INVENTION

In the semiconductor industry, there is a continuing trend
toward higher device densities. To achieve these high
densities, there has been and continues to be efforts toward
scaling down the device dimensions (e.g., at submicron
levels) on semiconductor wafers. In order to accomplish
such high device packing density, smaller and smaller fea-
ture sizes are required. This may include the width and
spacing of interconnecting lines, spacing and diameter of
contact holes (vias), and the surface geometry such as
corners and edges of various features.

The requirement of small features with close spacing
between adjacent features requires high resolution photo-
lithographic processes. In general, lithography refers to
processes for pattern transfer between various media. It is a
technique used for integrated circuit fabrication in which a
silicon slice, the wafer, is coated uniformly with a radiation-
sensitive film, the photoresist, and an exposing source (such
as optical light, x-rays, or an electron beam) illuminates
selected areas of the surface through an intervening master
template, the mask, for a particular pattern. The photoresist
receives a projected image of the subject pattern. Once the
image is projected, it is indelibly formed in the photoresist.
The projected image may be either a negative or a positive
image of the subject pattern. Exposure of the photoresist
through a photomask causes the image area to become either
more or less soluble (depending on the coating) in a par-
ticular solvent developer. The more soluble areas are
removed in the developing process to leave the pattern
image in the photoresist as less soluble polymer.

Projection lithography is a powerful and essential tool for
microelectronics processing. As feature sizes are driven
smaller and smaller, optical systems are approaching their
limits caused by the wavelengths of the optical radiation. A
recognized way of reducing the feature size of circuit
elements is to lithographically image the features with
radiation of a shorter wavelength. "Long" or "soft" x-rays
(a.k.a, extreme ultraviolet (EUV)), wavelength range of
 $\lambda=50$ to 700 Angstroms (\AA) are now at the forefront of
research in an effort to achieve the smaller desired feature
sizes.

Although EUV lithography provides substantial advan-
tages with respect to achieving high resolution patterning,
the shorter wavelength radiation is highly absorbed by the
photoresist material. Consequently, the penetration depth of
the radiation into the photoresist is limited. The limited
penetration depth of the shorter wavelength radiation
requires the use of ultra-thin photoresists so that the radia-
tion can penetrate the entire depth of the photoresist in order
to effect patterning thereof. However, the thinness of such
ultra-thin photoresists results in the etch resistance thereof
to be relatively low. In other words, the etch protection
afforded by ultra-thin photoresists is limited which in turn
limits the EUV lithographic process.

SUMMARY OF THE INVENTION

The present invention relates to a method to facilitate
lithographic processes employing extreme ultra-violet

2

(EUV) radiation and/or deep UV radiation in fabricating
vias. As noted above, EUV and deep UV radiation are
preferred radiation sources in lithographic processes where
fine resolution is desired. The short wavelengths of these
types of radiation afford for fine patterning (e.g., critical
feature sizes $<0.25 \mu\text{m}$). However, these types of radiation
are highly absorbed by photoresist material which conse-
quently limits the depth of penetration by the radiation into
the photoresist material.

By employing a transition metal layer to be patterned as
a hard mask for use in connection with etching the vias, the
present invention affords for expanding available etch chem-
istries useable in EUV and/or deep UV lithographic pro-
cesses. In particular, these types of lithographic processes
require the use of very thin photoresists as a result of the
depth of penetration limitations of the short wavelength
radiation. Such very thin photoresists are limited in their
capacity as etch barriers due to the thickness thereof.

In the present invention, the ultra-thin photoresist is
employed in patterning and etching (e.g., with a high selec-
tivity fluorocarbon plasma) the transition metal layer there-
under to form a hard mask. A via pattern formed in the
photoresist with the short wavelength radiation is transferred
to the transition metal layer by a first etch step. The patterned
transition metal layer is used as a hard mask for a subsequent
second etch step to etch a dielectric layer so as to form
contact holes therein corresponding to the via pattern.
Thereafter, standard via formation processes are performed
to fill the contact holes, planarize the filler material, etc. to
form the via having a cross-section with a largest transverse
dimension less than $0.25 \mu\text{m}$. Thus, the present invention
affords for taking advantage of the fine resolution patterning
available from EUV and deep UV lithographic processes
and mitigates the limitations associated therewith with
respect to etch chemistry.

One specific aspect of the present invention relates to a
method of forming a via structure. In the method, a dielectric
layer is formed on an anti-reflective coating (ARC) covering
a first metal layer. A transition metal layer is formed on the
dielectric layer. An ultra-thin photoresist layer is formed on
the transition metal layer, and the ultra-thin photoresist layer
is patterned with short wavelength radiation to define a
pattern for the via structure. The patterned ultra-thin pho-
toresist layer is used as a mask during a first etch step to
transfer the via pattern to the transition metal layer. The first
etch step includes an etch chemistry that is selective to the
transition metal layer over the ultra-thin photoresist layer.
The transition metal layer is employed as a hard mask during
a second etch step to form a contact hole corresponding to
the via pattern by etching portions of the dielectric layer.

Another aspect of the present invention relates to a via
structure having a largest transverse dimension below about
 $0.18 \mu\text{m}$. In forming the structure, In the method, a dielectric
layer is formed on an anti-reflective coating covering a first
metal layer. A transition metal layer is formed on the
dielectric layer. An ultra-thin photoresist layer is formed on
the transition metal layer. The ultra-thin photoresist layer is
patterned with short wavelength radiation to define a pattern
for the via structure. The ultra-thin photoresist layer is used
as a mask during a first etch step to transfer the via pattern
to the transition metal layer, the first etch step including an
etch chemistry that is selective to the transition metal layer
over the ultra-thin photoresist layer. The transition metal
layer is used as a hard mask during a second etch step to
form a contact hole corresponding to the via pattern by
etching portions of the dielectric layer.

Another aspect of the present invention relates to a
method of forming a via structure. In the method, a dielectric

6,162,587

3

layer is formed on an anti-reflective coating covering a first metal layer. A transition metal layer is formed on the dielectric layer, the transition metal layer having a thickness within the range of 50 Å–2000 Å. An ultra-thin photoresist layer is formed on the transition metal layer, the ultra-thin photoresist layer having a thickness within the range of 50 Å–2000 Å. The ultra-thin photoresist layer is patterned with short wavelength radiation to define a pattern for the via structure, the short wavelength radiation falling within the range of about 11 nm to 13 nm. The ultra-thin photoresist layer is used as a mask during a first etch step to transfer the via pattern to the transition metal layer, the first etch step including an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer and the dielectric layer. The transition metal layer is used as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer.

Yet another aspect of the present invention relates to a method of forming a multi-layered interconnect structure. In the method, a first dielectric layer is formed on an anti-reflective coating covering a first metal layer. A transition metal layer is formed on the dielectric layer, the transition metal layer having a thickness within the range of 50 Å–2000 Å. An ultra-thin photoresist layer is formed on the transition metal layer, the ultra-thin photoresist layer having a thickness within the range of 50 Å–2000 Å. The ultra-thin photoresist layer is patterned with short wavelength radiation to define a pattern for a via, the short wavelength radiation falling within the range of about 11 nm to 13 nm. The ultra-thin photoresist layer is used as a mask during a first etch step to transfer the via pattern to the transition metal layer. The first etch step includes an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer. The transition metal layer is employed as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer. The contact hole is filled with a conductive material so as to form the via. The hard mask is removed and the conductive material planarized via CMP. A second metal layer is formed over the via, and a second dielectric layer is formed over the second metal layer.

To the accomplishment of the foregoing and related ends, the invention, then, comprises the features hereinafter fully described and particularly pointed out in the claims. The following description and the annexed drawings set forth in detail certain illustrative embodiments of the invention. These embodiments are indicative, however, of but a few of the various ways in which the principles of the invention may be employed. Other objects, advantages and novel features of the invention will become apparent from the following detailed description of the invention when considered in conjunction with the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a prior art schematic cross-sectional illustration of a conventional patterned resist used in the formation of vias;

FIG. 2 is a perspective illustration of a multi-layered interconnect structure employing vias formed in accordance with one aspect of the present invention;

FIGS. 3a–3e illustrate representative filled via structures which may be formed in accordance with the present invention

FIG. 4 is a schematic cross-sectional illustration of a metal layer having an anti-reflective coating (ARC) formed thereon in accordance with one aspect of the present invention;

4

FIG. 5 is a schematic cross-sectional illustration of a dielectric layer formed over the ARC layer of FIG. 4 in accordance with one aspect of the present invention;

FIG. 6 is a schematic cross-sectional illustration of a transition metal layer formed over the dielectric layer of FIG. 5 in accordance with one aspect of the present invention;

FIG. 7 is a schematic cross-sectional illustration of an ultra-thin photoresist layer formed over the transition metal layer of FIG. 6 in accordance with one aspect of the present invention;

FIG. 8 is a schematic cross-sectional illustration of the ultra-thin photoresist layer of FIG. 7 undergoing a patterning step in accordance with one aspect of the present invention;

FIG. 9 is a schematic cross-sectional illustration of the ultra-thin photoresist layer of FIG. 8 after the patterning step is substantially complete in accordance with one aspect of the present invention;

FIG. 10 is a schematic cross-sectional illustration of the transition metal layer of FIG. 9 undergoing an etching step in accordance with one aspect of the present invention;

FIG. 11 is a schematic cross-sectional illustration of the transition metal layer of FIG. 10 after the etching step is substantially complete in accordance with one aspect of the present invention;

FIG. 12 is a schematic cross-sectional illustration of the transition metal layer and dielectric layer of FIG. 11 undergoing an etching step in accordance with one aspect of the present invention;

FIG. 13 is a schematic cross-sectional illustration of the transition metal layer and dielectric layer of FIG. 12 after the etching step is substantially complete to form a contact hole in accordance with one aspect of the present invention;

FIG. 14 is a schematic cross-sectional illustration of the contact hole of FIG. 13 undergoing a filling (plugging) step with a conductive material to form a via in accordance with one aspect of the present invention;

FIG. 15 is a schematic cross-sectional illustration of a via after the filling step of FIG. 14 is substantially complete in accordance with one aspect of the present invention;

FIG. 16 is a schematic cross-sectional illustration of the conductive material of FIG. 15 undergoing a planarization process in accordance with one aspect of the present invention;

FIG. 17 is a schematic cross-sectional illustration of the via substantially complete in accordance with one aspect of the present invention;

FIG. 18 is a schematic cross-sectional illustration of a second metal layer being formed over the via structure in accordance with one aspect of the present invention;

FIG. 19 is a schematic cross-sectional illustration of the second metal layer formed in substantial part in accordance with one aspect of the present invention;

FIG. 20 is a schematic cross-sectional illustration of second dielectric layer being formed over the second metal layer in accordance with one aspect of the present invention;

FIG. 21 is a schematic cross-sectional illustration of the second dielectric layer formed in substantial part so as to form a multi-layered interconnect structure in accordance with one aspect of the present invention; and

FIG. 22 is a perspective illustration of the multi-layered interconnect structure of FIG. 21 in accordance with one aspect of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The present invention will now be described with reference to the drawings, wherein like reference numerals are

6,162,587

5

used to refer to like elements throughout. The method of the present invention will be described with reference to the formation of vias using a photolithographic process employing radiation of short wavelength (e.g., EUV radiation and/or deep UV radiation) and an ultra-thin photoresist. The following detailed description is of the best modes presently contemplated by the inventors for practicing the invention. It should be understood that the description of these preferred embodiments are merely illustrative and that they should not be taken in a limiting sense.

FIG. 1 is a cross-sectional illustration of a conventional photoresist layer 20 being used in the formation of via(s). As shown, the photoresist layer 20 is substantially thick (e.g., 5,000–10,000 Å). The photoresist layer 20 is shown patterned so as to define a via which will be etched into an underlying dielectric layer 22 so as to form a contact hole to an underlying anti-reflective coating layer 24 and a metal layer 26. However, the thickness of the photoresist layer 20 is not conducive for use with short wavelength radiation because these types of radiation would be highly absorbed by the photoresist layer 20 and not penetrate the entire thickness “t” of the layer 20. As a result, such a conventional scheme for forming a via would not be able to take advantage of the improved resolution of patterning offered by the short wavelength radiation.

Turning now to the present invention in detail, FIG. 2 illustrates an interconnect structure 30 having vias 32 formed in accordance with the present invention. The vias 32 are filled with a suitable material (e.g., tungsten, copper) to form plugs which provide conductive pathways through an insulating dielectric medium 40 to connect interconnects of different conductor layers 50, 52. Although, the present invention is described with respect to forming only two conductive layers 50, 52 for ease of understanding, it is to be appreciated that many more conductive layers (selectively electrically isolated with the dielectric material 40) may be formed, and such structures are intended to fall within the scope of the hereto appended claims.

The vias 32 are formed employing photolithographic techniques utilizing short wavelength radiation and ultra-thin photoresists. Accordingly, substantially smaller dimensions of the vias 32 are achieved as compared to vias formed in accordance with the prior art technique discussed with respect to FIG. 1. For example, the vias 32 may have respectively a critical feature dimension of less than about 0.25 μm, and such small dimension is not typically obtainable using conventional lithographic processes. In another embodiment, the vias may have respectively a critical feature dimension of less than about 0.18 μm.

FIGS. 3a–3e illustrate representative filled via structures which may be formed in accordance with the present invention. FIG. 3a depicts a via structure 32_a which is substantially cylindrical and has a substantially circular cross-section 34_a. A diameter “d_a” of the cross-section 34_a in one particular embodiment is less than about 0.25 μm. In another embodiment, the d_a is less than about 0.18 μm.

FIG. 3b depicts a via structure 32_b which is substantially cylindrical and has a substantially elliptical cross-section 34_b. A length dimension for a major axis “d_b” of the cross-section 34_b in one particular embodiment is less than about 0.25 μm. In another embodiment, the d_b is less than about 0.18 μm.

FIG. 3c depicts a via structure 32_c which is substantially cylindrical and has a substantially square cross-section 34_c. A diagonal length dimension “d_c” of the cross-section 34_c in one particular embodiment is less than about 0.25 μm. In another embodiment, the d_c is less than about 0.18 μm.

6

FIG. 3d depicts a via structure 32_d which is substantially cylindrical and has a substantially rectangular cross-section 34_d. A diagonal length dimension “d_d” of the cross-section 34_d in one particular embodiment is less than about 0.25 μm. In another embodiment, the d_d is less than about 0.18 μm.

FIG. 3e depicts a via structure 32_e which is substantially cylindrical and has a substantially irregular shaped cross-section 34_e. A largest transverse dimension “d_e” of the cross-section 34_e in one particular embodiment is less than about 0.25 μm. In another embodiment, the d_e is less than about 0.18 μm.

The various aforementioned dimensions (d_a, d_b, d_c, d_d, and d_e) will be referred to as the largest transverse dimensions, which are respectively the maximum length dimension of a transverse cross-section of the via 32 with respect to a y-axis as shown in FIGS. 3a–3e.

Turning now to FIGS. 4–21, the fabrication of the vias 32 is discussed in greater detail. FIG. 4 is a cross-sectional illustration of a first metal layer 60, which is part of the conductive layer 50 and a graded anti-reflective coating (ARC) 62 formed thereon. Although not shown, it is to be appreciated that the first metal layer 60 may be formed over a substrate, for example. The first metal layer 60 may comprise any suitable conductive material employable for forming conductive patterns in the semiconductor industry. Preferably, the conductive material includes a member selected from the group consisting of refractory materials, such as titanium and titanium alloys, tungsten and tungsten alloys, aluminum and aluminum alloys, copper and copper alloys and polycrystalline silicon. The ARC 62 is left over from a previous patterning of the first metal layer 60 (e.g., to pattern metal lines). The ARC 62 preferably comprises titanium nitride (TiN), however, any like material may be employed. The ARC 62 serves as an etch stop layer for a dielectric etch step discussed in greater detail below. The ARC 62 is conductive and thus if remaining after the dielectric etch, the ARC 62 will not inhibit an electrically conductive connection between the first metal layer 60 and the via 32 which may serve as an electrically conductive link to another metal layer or element (e.g., conductive line).

Furthermore, the ARC 62 serves as an etch stop region during the dielectric etch to provide for a margin of error in the dielectric etch so as to mitigate damage to the first metal layer 60 by the dielectric etch. The thickness of the ARC layer 62 is preferably within the range of 300 Å–1500 Å, however, any thickness suitable for carrying out the aforementioned functions of the ARC 62 may be employed.

FIG. 5 illustrates a dielectric layer 66 formed over the ARC layer 62. The dielectric layer 66 is part of the dielectric 40. The dielectric layer provides for insulating conductive elements (e.g., adjacent metal lines) from each other so as to mitigate electrical shorting and/or capacitive crosstalk there between. Preferably, the dielectric layer 66 includes tetraethyorthosilicate (TEOS). However, and suitable insulating material (e.g., phosphosilicate glass (PSG), borophosphosilicate glass (BPSG), any suitable spin-on glass (SOG), or polyimides having a suitably low dielectric constant) may be employed. The dielectric layer 66 may be deposited by any suitable process (e.g., Low Pressure Chemical Vapor Deposition (LPCVD), Plasma Enhanced Chemical Vapor Deposition (PECVD), or High Density Plasma Chemical Vapor Deposition (HDPCVD)) to a desired thickness.

Next, as shown in FIG. 6, a transition metal layer 70 is formed over the dielectric layer 66. The transition metal layer 70 will serve as a hard mask during etching of the underlying dielectric layer 66. The transition metal layer 70

may comprise any one or more of Ti, Ta, W, TiN, TaN, and WN, for example. Any suitable technique for forming the transition metal layer **70** may be employed such as LPCVD, PECVD, HDCVD, sputtering or high density plasma chemical vapor deposition (HDPCVD) techniques to a thickness suitable for serving as a hard mask for a selective etch of the dielectric layer **66**. Thus, for example, in one aspect of the present invention the thickness of the transition metal layer **70** is between the range of about 50 Å–10,000 Å. In another aspect, the thickness of the transition metal layer **70** is between the range of about 50 Å–5000 Å. In another aspect, the thickness of the transition metal layer **70** is between the range of about 50 Å–3000 Å. In another aspect, the thickness of the transition metal layer **70** is between the range of about 50 Å–2000 Å. In another aspect, the thickness of the transition metal layer **70** is between the range of about 50 Å–1500 Å. In another aspect, the thickness of the transition metal layer **70** is between the range of about 50 Å–1000 Å. In still another aspect, the thickness of the transition metal layer **70** is between the range of about 50 Å–500 Å.

FIG. 7 illustrates an ultra-thin photoresist layer **80** formed over the transition metal layer **70**. The ultra-thin photoresist layer **80** has a thickness of about 500 Å–5000 Å, however, it is to be appreciated that the thickness thereof may be of any dimension suitable for carrying out the present invention. Accordingly, the thickness of the ultra-thin photoresist **80** can vary in correspondence with the wavelength of radiation used to pattern the ultra-thin photoresist **80**. One aspect of the present invention provides for forming the ultra-thin photoresist layer **80** to have a thickness within the range of 1000 Å to 4000 Å. Another aspect of the present invention provides for forming the ultra-thin photoresist layer **80** to have a thickness within the range of 2000 Å to 3000 Å. Yet another aspect of the present invention provides for forming the ultra-thin photoresist layer **80** to have a thickness within the range of 500 Å to 2000 Å. The ultra-thin photoresist **80** may be formed over the transition metal layer **70** via conventional spin-coating or spin casting deposition techniques.

The ultra-thin photoresist layer **80** has a thickness suitable for functioning as a mask for etching the underlying transition metal layer **70** and for forming patterns or openings in the developed ultra-thin photoresist layer **80** that are 0.25 μm or less. Since the ultra-thin photoresist layer **80** is relatively thin compared with I-line, regular deep UV and other photoresists, improved critical dimension control is realized.

Ultra-thin resists are processed using small wavelength radiation. Small wavelength radiation increases precision and thus the ability to improve critical dimension control. Specific examples of wavelengths to which the ultra-thin photoresist **80** is sensitive (undergo chemical transformation enabling subsequent development) include about 248 nm, about 193 nm, about 157 nm, about 13 nm, about 11 nm, and as low as 4 nm. Specific sources of radiation include KrF excimer lasers having a wavelength of about 248 nm, a XeHg vapor lamp having a wavelength from about 200 nm to about 250 nm, mercury-xenon arc lamps having a wavelength of about 248 nm, an ArF excimer laser having a wavelength of about 193 nm, an F₂ excimer laser having a wavelength of about 157 nm, and EUV having a wavelength of about 15 nm to about 10 nm, and as low as 4 nm.

Positive or negative ultra-thin photoresists may be employed in the methods of the present invention. An example of a deep UV chemically amplified photoresist is a partially t-butoxycarbonyloxy substituted poly-p-hydroxystyrene. Photoresists are commercially available from a number of sources, including Shipley Company,

Kodak, Hoechst Celanese Corporation, Brewer and IBM. The scope of the present invention as defined by the hereto appended claims is intended to include any ultra-thin photoresist suitable for carrying out the present invention.

Referring to FIG. 8, the ultra-thin photoresist layer **80** then undergoes an exposure/development step **90** to provide a patterned photoresist **100** (FIG. 9). The patterned photoresist **100** is formed using electromagnetic radiation having a relatively small wavelength (for example, less than 200 nm). In this embodiment, electromagnetic radiation having a wavelength of about 13 nm is employed. Since relatively small wavelengths are used, reflectivity concerns are minimized because larger wavelengths are more frequently associated with reflectivity problems. The ultra-thin photoresist layer **80** is selectively exposed to radiation; that is, selected portions of the ultra-thin photoresist layer **80** are exposed to radiation. Either the exposed or unexposed portions of the ultra-thin photoresist layer **80** are removed or developed to provide the patterned photoresist **100**.

The critical feature dimension “d” of the exposed portion of the transition metal layer **70** (opening **102** in the patterned photoresist **100**) is about 0.25 μm or less, including about 0.18 μm or less, about 0.09 μm or less, about 0.075 μm or less and about 0.05 μm or less, depending on the wavelength of the radiation used.

The selectively exposed ultra-thin photoresist layer **80** is developed by contact with a suitable developer that removes either the exposed or unexposed portions of the ultra-thin photoresist layer **80**. The identity of the developer depends upon the specific chemical constitution of the ultra-thin photoresist layer **80**. For example, an aqueous alkaline solution may be employed to remove unexposed portions of the ultra-thin photoresist layer **80**. Alternatively, one or more of dilute aqueous acid solutions, hydroxide solutions, water, and organic solvent solutions may be employed to remove selected portions of the ultra-thin photoresist layer **80**. The developer is selected so that it does not degrade or etch the material of the transition metal layer **70**, or at least degrades or etches the material of the transition metal layer **70** at a substantially slower rate as compared to the rate that the material of the ultra-thin photoresist layer **80** is developed. In other words, the transition metal layer **70** serves as an etch-stop layer when developing the ultra-thin photoresist layer **80**.

The patterned photoresist **100** may assume any suitable pattern, but typically the patterned photoresist **100** corresponds to the desired via pattern. In the present invention, the patterned photoresist **100** defines one or more vias. The patterned photoresist **100** defines one or more openings over the transition metal layer **70** corresponding to the vias(s) **32** (FIG. 2) to be formed. The patterned photoresist **100** serves as an etch mask layer for processing or etching the underlying transition metal layer **70**.

Referring now to FIG. 10, the patterned photoresist **100** is used as a mask for selectively etching the transition metal layer **70** to provide patterned transition metal layer **110** (FIG. 11) from a first etch step **120**. Any suitable etch technique may be used to etch the transition metal layer **70**. Preferably, a selective etch technique may be used to etch the material of the transition metal layer **70** at a relatively greater rate as compared to the rate that the material of the patterned photoresist **100** is etched. The first etch step **120** is also highly selective to the transition metal layer **70** over the underlying dielectric layer **66** so as to mitigate damage to the dielectric layer **66**.

Preferably, the transition metal layer **70** is etched using an anisotropic etching process—dry or wet etching techniques

6,162,587

9

may be employed, although dry etching is preferred. A transition metal:photoresist etch technique may be used to etch the transition metal layer **70** to provide the patterned transition metal layer **110** and continue to define opening **102** exposing portions of the dielectric layer **66** lying under the patterned transition metal layer **110**. The transition metal:photoresist etch selectivity may be within the range of 2:1 to greater than 40:1 depending on the transition metal material, and one skilled in the art could readily tailor a suitable etch chemistry to correspond to the characteristics of the transition metal layer **70** and the patterned photoresist **100**. For example, using the patterned photoresist **100** as a mask, the transition metal layer **70** (e.g., in this particular example comprising W or WN) is selectively etched with a high selectivity fluorocarbon plasma etch (e.g., containing SF₆), which is highly selective of the transition metal over the photoresist **100**, to form a patterned transition metal layer **110** exposing a portion of the dielectric layer **66**.

The W or WN may be etched with the SF₆ chemistry using magnetic enhanced reactive ion etching (MERIE), electron cyclotron etching (ECR), or conventional reactive ion etching (RIE) methods. According to the present example, a MERIE method is used with reactant gases of SF₆ (30–50 sccm) and O₂ (10–40 sccm) at a power level within the range of about 200–800 W, and pressure within the range of about 20–200 mT. This chemistry has very high selectivity to the transition metal material over the photoresist material, and the selectivity of various embodiments, respectively, may be tailored to be greater than 5:1; greater than 10:1; greater than 20:1; greater than 30:1; and greater than 40:1 depending on the particular embodiment employed.

In the case of the transition metal layer **70** comprising Al, Ta, TaN, Ti or TiN, the transition metal **70** may be etched with Cl₂ chemistry using magnetic enhanced reactive ion etching (MERIE), electron cyclotron etching (ECR), or conventional reactive ion etching (RIE) methods. According to the present example, a MERIE method is used with reactant gases of Cl₂ (30–100 sccm) and BCl₃ (10–100 sccm) at a power level within the range of about 300–800 W, and pressure within the range of about 60–400 mT. This chemistry has reasonably high selectivity to the transition metal material over the photoresist material, and the selectivity of various embodiments, respectively, may be tailored to be greater than 5:1; greater than 6:1; greater than 7:1; greater than 8:1; greater than 9:1; and greater than 10:1 depending on the particular embodiment employed.

Turning now to FIG. **12**, the dielectric layer **66** is shown undergoing an etching process **130** wherein the patterned transition metal layer **110** serves a hard mask thereto. For example, the etching process **130** may include a reactive ion etch (RIE), that is highly selective to the dielectric layer **66** with respect to the patterned transition metal layer **110** and the ARC **62**. It is to be appreciated that any suitable etch methodology for selectively etching the dielectric layer **66** over the patterned transition metal layer **110** may be employed and is intended to fall within the scope of the hereto appended claims. For example, the etch process **130** may include using a MERIE system with power within the range of about 1000 W to 2000 W; pressure within the range of about 20 mT to 100 mT; and a gas chemistry including C₄F₈ at about 5 sccm to 20 sccm; CO at about 50 sccm to 500 sccm; Ar at about 50 sccm to 500 sccm; and O₂ at about 0 sccm to 10 sccm. The selectivity to the dielectric layer **66** over the hard mask **110** may range from 5:1 to greater than 40:1. Any remaining ultra-thin photoresist **100** (not shown) will be removed as well during the etch process **130** partly

10

because of its thinness and inability to serve as a sole etch barrier for the dielectric layer etch **130**. However, if desired the ultra-thin photoresist **100** may be completely stripped away prior to performing the etch process **130**.

FIG. **13** illustrates a contact hole **140** formed in substantial part. Thereafter, in FIGS. **14** and **15** the contact hole **140** undergoes a filling process **150** wherein a conductive filler material **160** (e.g., W, Cu) fills the contact hole **140** to form a plug which provides a conductive pathway through the dielectric layer **66** to connect interconnects of different conductor layers (e.g., **50**, **52**). Although, the present invention is described with respect to forming only two conductive layers for ease of understanding, it is to be appreciated that many more conductive layers separated with the dielectric material **66** may be formed, and such structures are intended to fall within the scope of the hereto appended claims. While different conductive materials are suitable to fill the contact hole **140**, in this example tungsten forms the conductive filler material **160**. The tungsten filled contact hole is referred to as a tungsten plug (which is the via **32**). Copper, aluminum or an aluminum alloy are exemplary of other plug conductors. The vias **32** may comprise any other suitable conductive material, which is chemical-vapor deposited with a flow rate sufficient to fill the contact holes **140** so as to have an aspect ratio greater than, for example, 4:1.

In an alternative embodiment, the vias **32** may include copper (Cu). Since Cu easily diffuses into dielectric materials such as SiO₂, a damascene process may be employed to create a barrier layer (e.g., tantalum nitride (TaN)) between the Cu and the dielectric so as to mitigate diffusion of the Cu into the dielectric **60**. Damascene techniques are known in the art, and therefore further discussion related thereto is omitted for sake of brevity. It is to be appreciated that the damascene technique may be performed to generate a barrier layer between any other suitable metal (e.g., tungsten) employed in the formation of the vias **32**.

Turning now to FIG. **16**, the hard mask **110** and the plug material **160** are removed from the upper surface of dielectric layer **66** using, for example, sacrificial etchback or chemical mechanical polishing (CMP) step **170** to remove and planarize the plug material **160** and hard mask layer **110** so as to result in the via structure **32** shown in FIG. **17**.

FIG. **18** illustrates the via structure **32** undergoing a deposition step **180** to deposit a second metal layer **190** (FIG. **19**) which is part of the conductive layer **52** (FIG. **2**). The second metal layer **190** may be deposited by any of a variety of suitable deposition techniques, such as CVD processes including low pressure chemical vapor deposition (LPCVD) and plasma enhanced chemical vapor deposition (PECVD), melting or sputtering. The second metal layer **190** may comprise any suitable conductive material and preferably includes a member selected from the group consisting of refractory materials, such as titanium and titanium alloys, tungsten and tungsten alloys, aluminum and aluminum alloys, copper and copper alloys. Although not shown, it is to be appreciated that a second metal patterning and etch process is performed so as to create the conductive layer **52** (FIGS. **2** and **22**).

In FIG. **20**, a dielectric deposition step **200** is performed to deposit a dielectric layer **210** (FIG. **21**) so as to substantially complete forming the dielectric insulating medium **40** (FIG. **2**). The dielectric layer **210** may comprise any suitable insulating material employable in the semiconductor industry for forming an insulating layer. Preferably, the dielectric layer **210** comprises a member selected from the group

6,162,587

11

consisting of nitrides, oxides, oxy-nitrides, polyimides, polymeric and aerogel materials. In the present embodiment, the dielectric layer **210** comprises SiO₂. The dielectric layer **210** may be deposited by any suitable process (e.g., Low Pressure Chemical Vapor Deposition (LPCVD), Plasma Enhanced Chemical Vapor Deposition (PECVD), or High Density Plasma Chemical Vapor Deposition (HDPCVD)) to a desired thickness so as to result in the multi-layered interconnect structure **32** illustrated in FIG. **22**.

Thus the present invention provides for a method of fabricating a via structure with critical feature dimensions below about the 0.25 μm level.

What has been described above are preferred embodiments of the present invention. It is, of course, not possible to describe every conceivable combination of components or methodologies for purposes of describing the present invention, but one of ordinary skill in the art will recognize that many further combinations and permutations of the present invention are possible. Accordingly, the present invention is intended to embrace all such alterations, modifications and variations that fall within the spirit and scope of the appended claims.

What is claimed is:

1. A method of forming a via, comprising the steps of:
 - forming a dielectric layer on an anti-reflective coating (ARC) layer covering a first metal layer;
 - forming a transition metal layer on the dielectric layer;
 - forming an ultra-thin photoresist layer on the transition metal layer, the ultra-thin photoresist layer having a thickness within the range of 500 Å–5000 Å;
 - patterning the ultra-thin photoresist layer with radiation to define a pattern for the via;
 - using the ultra-thin photoresist layer as a mask during a first etch step to transfer the via pattern to the transition metal layer, the first etch step including an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer;
 - using the transition metal layer as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer; and
 - forming the transition metal layer to have a thickness within the range of about 50 Å–2000 Å.
2. The method of claim 1, further including the step of forming the transition metal layer to have a thickness within the range of about 50 Å–1500 Å.
3. The method of claim 1, further including the step of forming the transition metal layer to have a thickness within the range of about 50 Å–1000 Å.
4. The method of claim 1, further including the step of forming the transition metal layer to have a thickness within the range of about 50 Å–500 Å.
5. A method of forming a via, comprising the steps of:
 - forming a dielectric layer on an anti-reflective coating (ARC) layer covering a first metal layer;
 - forming a transition metal layer on the dielectric layer;
 - forming an ultra-thin photoresist layer on the transition metal layer, the ultra-thin photoresist layer having a thickness within the range of 500 Å–5000 Å;
 - patterning the ultra-thin photoresist layer with radiation to define a pattern for the via;
 - using the ultra-thin photoresist layer as a mask during a first etch step to transfer the via pattern to the transition metal layer, the first etch step including an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer;

12

including an etch chemistry for the first etch step having a selectivity to the transition metal layer over the ultra-thin photoresist layer greater than about 40:1; and using the transition metal layer as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer.

6. A method of forming a via, comprising the steps of:
 - forming a dielectric layer on an anti-reflective coating (ARC) layer covering a first metal layer;
 - forming a transition metal layer on the dielectric layer;
 - forming an ultra-thin photoresist layer on the transition metal layer, the ultra-thin photoresist layer having a thickness within the range of 500 Å–5000 Å;
 - patterning the ultra-thin photoresist layer with radiation to define a pattern for the via;
 - using the ultra-thin photoresist layer as a mask during a first etch step to transfer the via pattern to the transition metal layer, the first etch step including an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer;
 - including an etch chemistry for the first etch step having a selectivity to the transition metal layer over the ultra-thin photoresist layer greater than about 30:1; and
 - using the transition metal layer as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer.
7. A method of forming a via, comprising the steps of:
 - forming a dielectric layer on an anti-reflective coating (ARC) layer covering a first metal layer;
 - forming a transition metal layer on the dielectric layer;
 - forming an ultra-thin photoresist layer on the transition metal layer, the ultra-thin photoresist layer having a thickness within the range of 500 Å–5000 Å;
 - patterning the ultra-thin photoresist layer with radiation to define a pattern for the via;
 - using the ultra-thin photoresist layer as a mask during a first etch step to transfer the via pattern to the transition metal layer, the first etch step including an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer;
 - including an etch chemistry for the first etch step having a selectivity to the transition metal layer over the ultra-thin photoresist layer greater than about 20:1; and
 - using the transition metal layer as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer.
8. A method of forming a via, comprising the steps of:
 - forming a dielectric layer on an anti-reflective coating (ARC) layer covering a first metal layer;
 - forming a transition metal layer on the dielectric layer;
 - forming an ultra-thin photoresist layer on the transition metal layer, the ultra-thin photoresist layer having a thickness within the range of 500 Å–5000 Å;
 - patterning the ultra-thin photoresist layer with radiation to define a pattern for the via;
 - using the ultra-thin photoresist layer as a mask during a first etch step to transfer the via pattern to the transition metal layer, the first etch step including an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer;
 - including an etch chemistry for the first etch step having a selectivity to the transition metal layer over the ultra-thin photoresist layer and the dielectric layer greater than about 10:1; and

6,162,587

13

using the transition metal layer as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer.

9. A method of forming a via, comprising the steps of: forming a dielectric layer on an anti-reflective coating (ARC) layer covering a first metal layer;

forming a transition metal layer on the dielectric layer;

forming an ultra-thin photoresist layer on the transition metal layer, the ultra-thin photoresist layer having a thickness within the range of 500 Å–5000 Å;

patterning the ultra-thin photoresist layer with radiation to define a pattern for the via;

using the ultra-thin photoresist layer as a mask during a first etch step to transfer the via pattern to the transition metal layer, the first etch step including an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer;

including an etch chemistry for the first etch step having a selectivity to the transition metal layer over the ultra-thin photoresist layer and the dielectric layer greater than about 5:1; and

using the transition metal layer as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer.

10. A method of forming a via, comprising the steps of: forming a dielectric layer on an anti-reflective coating (ARC) layer covering a first metal layer;

forming a transition metal layer on the dielectric layer;

forming an ultra-thin photoresist layer on the transition metal layer, the ultra-thin photoresist layer having a thickness within the range of 500 Å–5000 Å;

patterning the ultra-thin photoresist layer with radiation to define a pattern for the via;

using the ultra-thin photoresist layer as a mask during a first etch step to transfer the via pattern to the transition metal layer, the first etch step including an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer;

using the transition metal layer as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer; and

including an etch chemistry for the second etch step having a selectivity to the dielectric layer over the transition metal layer greater than about 5:1.

11. A method of forming a via, comprising the steps of: forming a dielectric layer on an anti-reflective coating (ARC) layer covering a first metal layer;

forming a transition metal layer on the dielectric layer;

forming an ultra-thin photoresist layer on the transition metal layer, the ultra-thin photoresist layer having a thickness within the range of 500 Å–5000 Å;

patterning the ultra-thin photoresist layer with radiation to define a pattern for the via;

using the ultra-thin photoresist layer as a mask during a first etch step to transfer the via pattern to the transition metal layer, the first etch step including an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer;

using the transition metal layer as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer; and

14

including an etch chemistry for the second etch step having a selectivity to the dielectric layer over the transition metal layer greater than about 6:1.

12. A method of forming a via structure, comprising the steps of:

forming a dielectric layer on an anti-reflective coating (ARC) layer covering a first metal layer;

forming a transition metal layer on the dielectric layer, the transition metal layer having a thickness within the range of 50 Å–2000 Å, the transition metal layer including at least one of Al, W, WN, Ta, TaN, Ti, and TiN;

forming an ultra-thin photoresist layer on the transition metal layer, the ultra-thin photoresist layer having a thickness within the range of 50 Å–2000 Å;

patterning the ultra-thin photoresist layer with short wavelength radiation to define a pattern for a via, the short wavelength radiation falling within the range of about 11 nm to 13 nm;

using the ultra-thin photoresist layer as a mask during a first etch step to transfer the via pattern to the transition metal layer, the first etch step including an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer and the dielectric layer; and

using the transition metal layer as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer.

13. A method of forming a multi-layered interconnect structure, comprising the steps of:

forming a first dielectric layer on an anti-reflective coating (ARC) layer covering a first metal layer;

forming a transition metal layer on the dielectric layer, the transition metal layer having a thickness within the range of 50 Å–2000 Å;

forming an ultra-thin photoresist layer on the transition metal layer, the ultra-thin photoresist layer having a thickness within the range of 50 Å–2000 Å;

patterning the ultra-thin photoresist layer with short wavelength radiation to define a pattern for a via, the short wavelength radiation falling within the range of about 11 nm to 13 nm;

using the ultra-thin photoresist layer as a mask during a first etch step to transfer the via pattern to the transition metal layer, the first etch step including an etch chemistry that is selective to the transition metal layer over the ultra-thin photoresist layer;

using the transition metal layer as a hard mask during a second etch step to form a contact hole corresponding to the via pattern by etching portions of the dielectric layer;

filling the contact hole with a conductive material so as to form the via;

removing the hard mask and planarizing the conductive material via CMP;

forming a second metal layer over the via; and

forming a second dielectric layer over the second metal layer.

14. The method of claim 13, wherein the first etch step is highly selective to the transition metal layer over the dielectric layer so as to mitigate damage to the dielectric layer.

* * * * *